



ADHESIVES • ACCESSORIES • TROWELS



ROBERTS



Carpet Adhesive
Adhesivo para alfombras

3095
SUPERIOR

- Extra heavy foot traffic areas
- Commercial grade
- Direct and double bond installations

- Áreas con tráfico peatonal extra pesado
- De rango comercial
- Instalaciones de pegamento directo y de doble pegamento

CANTIDAD: 5 GAL (18.9 L)

a quality brand of



In 1938, the carpet industry had just begun to use liquid latex for carpet seaming and repair. The newly formed Roberts Company developed a new latex formula of its own and labeled it Rub-er-ege, laying the groundwork for today's thriving Adhesives Division of Roberts Consolidated Industries, Inc. Roberts continued with innovations in the industry and pioneered the Double Bond Carpet Installation method which is now a recognized standard that has stood the test of time. Roberts has been a leader in the manufacturing of adhesives ever since, producing its first solvent free adhesive in the 1980's and continuing to develop environmentally friendlier products. With locations and product lines known and used throughout the world, Roberts has been recognized as the premier brand of adhesives, carpet installation tools and accessories. Worldwide, the Roberts name continues to be the manufacturer of choice for installation professionals who demand quality and reliability.

ROBERTS® , SUPPORTING PROFESSIONAL INSTALLERS SINCE 1938

CONTENTS



MULTIPURPOSE ADHESIVES

04




CARPET ADHESIVES

06




VINYL, VCT & WALL BASE ADHESIVES

09

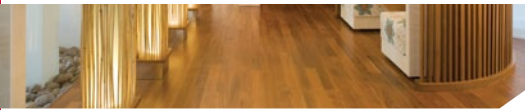

WOOD ADHESIVES

12

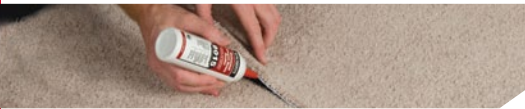


SPECIALTY ADHESIVES & ACCESSORIES

14



ADHESIVE CLEANERS

18

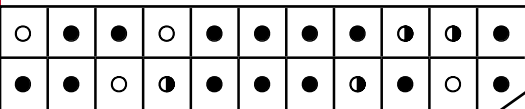

ADHESIVE REFERENCE CHART

19



TROWELS

20

Roberts Consolidated Industries actively participates with governing agencies and organizations to establish the highest standards for environmentally conscientious products. We seek continuous improvement in our product development to globally offer the most ecologically responsible products.



The CRI Green Label +Plus® Logo indicates that these adhesives have been rigorously tested and meet the most stringent criteria for low chemical emissions and are among the lowest emitting VOC products in the market.



Roberts Consolidated Industries introduces GoldGuard® Antimicrobial Technology. GoldGuard offers a two-tier antimicrobial protection system for both the wet and dry state to inhibit the growth of mold, mildew and odor causing bacteria. GoldGuard's first tier of protection inhibits the growth of micro-organisms to prevent the attack on the adhesive in the pail. GoldGuard's second tier of antimicrobial protection works to inhibit the growth of mold, mildew and odor and stain causing bacteria on the dried adhesive film.



Many of our adhesives contribute one or more points in the LEED rating system as outlined by the U.S. Green Building Council. The LEED® green building certification program is the nationally accepted benchmark for the design, construction, and operation of green buildings. For information about specific adhesives, please contact your local sales representative.



When you see our Enviro Friendly e® logo on a product you are not only choosing a product that is environmentally conscious, you are supporting a company that is committed to protect and sustain our environment.

MULTIPURPOSE ADHESIVES



Carpet & Felt-Back Vinyl Adhesive

3300 SUPERIOR



FEATURES

- Heavy traffic areas
- Strong grab reduces bubbling and curling
- High rebound
- Direct and double bond installations

SPECIFICATIONS

Item No.	3300-4	3300-1
Unit Size	4 Gallon	1 Gallon
Package Qty.	1	4

TROWELS AND COVERAGE

Carpet (polypropylene)

1/8" x 1/8" x 1/16"
90-110 sq. ft. per gallon

Felt-Back Sheet Vinyl

1/16" x 1/16" x 3/32"
160-180 sq. ft. per gallon

Felt-Back Sheet Vinyl

1/16" x 1/16" x 1/16"
170-190 sq. ft. per gallon

Roberts 3300 is a superior grade multipurpose carpet and felt-back vinyl adhesive developed for the installation of most types of commercial carpet and felt-backed sheet vinyl floor coverings.

Open Time: Up to 30 min. Working Time: Up to 60 min.

Carpet & Felt-Back Vinyl Adhesive

3085 PREFERRED



FEATURES

- Heavy traffic areas
- Excellent for pattern carpets
- Great adjustability time

SPECIFICATIONS

Item No.	3085-4	3085-1
Unit Size	4 Gallon	1 Gallon
Package Qty.	1	4

TROWELS AND COVERAGE

Carpet (polypropylene)

1/8" x 1/8" x 1/16"
90-110 sq. ft. per gallon

Felt-Back Sheet Vinyl

1/16" x 1/16" x 3/32"
160-180 sq. ft. per gallon

Felt-Back Sheet Vinyl

1/16" x 1/16" x 1/16"
170-190 sq. ft. per gallon

Roberts 3085 is a high performance commercial-grade multipurpose adhesive developed for the direct glue installation of most commercial carpets and felt-back sheet vinyl. It offers great adjustability time and once dry, a very strong bond to hold pattern carpets in place.

Open Time: Up to 40 min. Working Time: Up to 70 min.

Carpet & Felt-Back Vinyl Adhesive

R3080 PREFERRED



FEATURES

- Quick leg development
- Strong bond strength
- High tack

SPECIFICATIONS

Item No.	R3080-4
Unit Size	4 Gallon
Package Qty.	1

TROWELS AND COVERAGE

Carpet (polypropylene)	Carpet (polypropylene, woven)	Felt-Back Sheet Vinyl
1/8" x 1/8" x 1/16" 90-110 sq. ft. per gallon	1/8" x 1/8" x 1/8" 65-75 sq. ft. per gallon	1/16" x 1/16" x 1/16" 170-190 sq. ft. per gallon

Roberts R3080 is a fast setting mid-range adhesive that offers a reduced open time and quick leg development. It is the perfect adhesive for jobs that require quick installation times.

Open Time: Up to 30 min. Working Time: Up to 50 min.

Carpet & Felt-Back Vinyl Adhesive

3000 PRIMARY



FEATURES

- Residential to light commercial grade
- Good positioning time for felt-back sheet vinyl
- Longer open time

SPECIFICATIONS

Item No.	3000-5	3000-4	3000-1	3000-0
Unit Size	5 Gallon	4 Gallon	1 Gallon	1 Quart
Package Qty.	1	1	4	6

TROWELS AND COVERAGE

Carpet (polypropylene)	Felt-Back Sheet Vinyl	Felt-Back Sheet Vinyl
1/8" x 1/8" x 1/16" 90-110 sq. ft. per gallon	1/16" x 1/16" x 3/32" 160-180 sq. ft. per gallon	1/16" x 1/16" x 1/16" 170-190 sq. ft. per gallon

Roberts 3000 is a carpet and sheet vinyl adhesive developed with a longer open time for the optimal positioning of felt-back vinyl flooring while it will also develop tack for the installation of most types of commercial carpets.

Open Time: Up to 60 min. Working Time: Up to 90 min.

Carpet & Felt-Back Vinyl Adhesive

3050 PRIMARY



FEATURES

- Residential to light commercial grade
- Fast tacking
- VOC compliant

SPECIFICATIONS

Item No.	3050-4
Unit Size	4 Gallon
Package Qty.	1

TROWELS AND COVERAGE

Carpet (polypropylene)	Felt-Back Sheet Vinyl	Felt-Back Sheet Vinyl
1/8" x 1/8" x 1/16" 90-110 sq. ft. per gallon	1/16" x 1/16" x 3/32" 160-180 sq. ft. per gallon	1/16" x 1/16" x 1/16" 170-190 sq. ft. per gallon

Roberts 3050 is a low VOC adhesive developed for the installation of carpet and felt-back sheet vinyl. Roberts 3050 is a fast tacking, economical adhesive.

Open Time: Up to 45 min. Working Time: Up to 90 min.

CARPET ADHESIVES

Carpet Adhesive

3095 SUPERIOR



FEATURES

- Fast grab
- Extra heavy foot traffic areas
- Direct and double bond installations

SPECIFICATIONS

Item No.	3095-4	3095-1
Unit Size	4 Gallon	1 Gallon
Package Qty.	1	4

TROWELS AND COVERAGE

Direct Bond Carpet (polypropylene)	Direct Bond Carpet (polypropylene)	Direct Bond Carpet (closed-cell urethane, Enhancer™)
1/8" x 1/8" x 1/16"	1/8" x 1/8" x 1/8"	3/32" x 3/32" x 3/32"
90-110 sq. ft. per gallon	65-75 sq. ft. per gallon	100-120 sq. ft. per gallon

Roberts 3095 is a commercial grade carpet adhesive developed for the most demanding carpet installations, including broadloom carpet. Roberts 3095 is an excellent adhesive for double-bond installations.

Open Time: Up to 20 min. Working Time: Up to 40 min.

Carpet Adhesive

R3090 PREFERRED



FEATURES

- Holds carpet quickly
- Rapid leg development
- Reduces edge curl
- Ideal for double bond

SPECIFICATIONS

Item No.	R3090-4
Unit Size	4 Gallon
Package Qty.	1

TROWELS AND COVERAGE

Carpet (polypropylene)	Carpet (polypropylene)	Felt-Back Sheet Vinyl
1/8" x 1/8" x 1/16"	1/8" x 1/8" x 1/8"	1/16" x 1/16" x 1/16"
90-110 sq. ft. per gallon	65-75 sq. ft. per gallon	170-190 sq. ft. per gallon

Roberts R3090 is a fast setting, multipurpose adhesive that offers rapid leg development to hold carpet in place. It is the perfect adhesive for jobs that require quick installation times. R3090 may also be used for double bond carpet installations.

Open Time: Up to 30 min. Working Time: Up to 50 min.

Carpet Adhesive

3900 PREFERRED



FEATURES

- Heavy commercial traffic
- Great up front tack
- Holds stiff carpets

SPECIFICATIONS

Item No.	3900-4
Unit Size	4 Gallon
Package Qty.	1

TROWELS AND COVERAGE

Direct Bond Carpet (polypropylene)	Direct Bond Carpet (polypropylene)	Direct Bond Carpet (closed-cell urethane, Enhancer™)
1/8" x 1/8" x 1/16"	1/8" x 1/8" x 1/8"	3/32" x 3/32" x 3/32"
90-110 sq. ft. per gallon	65-75 sq. ft. per gallon	100-120 sq. ft. per gallon

Roberts 3900 is a high performance direct glue down carpet adhesive recommended for light to heavy traffic. 3900 is a rapid grabbing adhesive to assist in holding stiff carpets in place during installation and is specifically designed with the desired characteristics for commercial carpet installation.

Open Time: Up to 25 min. Working Time: Up to 45 min.

Carpet Adhesive

3500 PRIMARY



FEATURES

- Extended open time
- Good in dry climates
- Light to medium traffic

SPECIFICATIONS

Item No.	3500-4
Unit Size	4 Gallon
Package Qty.	1

TROWELS AND COVERAGE

Direct Bond Carpet (polypropylene)	Direct Bond Carpet (polypropylene)	Direct Bond Carpet (closed-cell urethane, Enhancer™)
1/8" x 1/8" x 1/16" 90-110 sq. ft. per gallon	1/8" x 1/8" x 1/8" 65-75 sq. ft. per gallon	3/32" x 3/32" x 3/32" 100-120 sq. ft. per gallon

Roberts 3500 is a direct glue down carpet adhesive recommended for residential to medium commercial traffic. Its extended open time allows plenty of time to install carpet and is also great for dry, non-humid regions where a longer open time is necessary.

Open Time: Up to 50 min. Working Time: Up to 80 min.

PRESSURE SENSITIVE ADHESIVES

Pressure Sensitive Adhesive

R6300 SUPERIOR



FEATURES

- Releasable or permanent bond
- High shear strength
- Plasticizer migration resistant

SPECIFICATIONS

Item No.	R6300-4	R6300-1
Unit Size	4 Gallon	1 Gallon
Package Qty.	1	4

TROWELS AND COVERAGE

Carpet Tile	Modular Carpet Tile	Luxury Vinyl Tile
1/16" x 1/16" x 1/16" 170-190 sq. ft. per gallon	Roller Up to 255 sq. ft. per gallon	1/16" x 1/32" x 1/32" 220-240 sq. ft. per gallon

Roberts R6300 is a high performance pressure sensitive adhesive which may be used to install carpet tiles, commercial carpet cushion, fiberglass reinforced sheet vinyl and luxury vinyl tiles. This product dries quickly and offers a higher shear strength making it the adhesive of choice for commercial installations where performance is key.

Permanent Install Open Time: Up to 20 min. Working Time: Up to 40 min. Releasable Install Tack Time: Approx. 45 min.

Pressure Sensitive Adhesive

R6280 PREFERRED



FEATURES

- Permanent or releasable
- Works with a variety of flooring types

SPECIFICATIONS

Item No.	R6280-4	R6280-1	R6280-0
Unit Size	4 Gallon	1 Gallon	1 Quart
Package Qty.	1	4	6

TROWELS AND COVERAGE

Carpet Tile	Modular Carpet Tile
1/16" x 1/16" x 1/16" 170-190 sq. ft. per gallon	Roller Up to 255 sq. ft. per gallon

R6280 is an acrylic pressure sensitive adhesive designed for the installation of fiberglass reinforced sheet vinyl, vinyl backed carpet tiles, commercial carpet cushion, and luxury vinyl tiles (12 in. x 12 in.). This product may be used as a releasable adhesive or a permanent adhesive (if flooring is installed while adhesive is still wet a permanent bond will be formed).

Permanent Install Open Time: Up to 20 min. Working Time: Up to 24 hrs. Releasable Install Tack Time: Approx. 60 min.

OUTDOOR CARPET ADHESIVES

Outdoor Carpet Adhesive

R6030 SUPERIOR



FEATURES

- Waterproof
- Grabs quickly
- Professional use only
- OTC compliant

SPECIFICATIONS

Item No.	R6030-4	R6030-1
Unit Size	4 Gallon	1 Gallon
Package Qty.	1	4

TROWELS AND COVERAGE



1/8" x 1/8" x 1/16"
90-110 sq. ft. per gallon



1/8" x 1/8" x 1/8"
65-75 sq. ft. per gallon

Roberts R6030 is a professional grade, solvent based adhesive for the installation of most types of outdoor carpets. This adhesive develops a strong initial grab to hold carpets in place, and resists all types of weather conditions for a strong long-term bond.

EXTREMELY FLAMMABLE

Open Time: Up to 15 min. Working Time: Up to 30 min.

Outdoor Carpet Adhesive

R6040 SUPERIOR



FEATURES

- Commercial-grade
- High initial grab
- Waterproof when dry

SPECIFICATIONS

Item No.	6040-4	6040-1
Unit Size	4 Gallon	1 Gallon
Package Qty.	1	4

TROWELS AND COVERAGE



1/8" x 1/8" x 1/16"
90-110 sq. ft. per gallon



1/8" x 1/8" x 1/8"
65-75 sq. ft. per gallon

Roberts R6040 is a superior grade outdoor carpet adhesive developed for exterior installations of most types of outdoor commercial carpets. **EXTREMELY FLAMMABLE**

Open Time: Up to 15 min. Working Time: Up to 30 min.

Indoor/Outdoor Carpet Adhesive

6700 SUPERIOR



FEATURES

- For interior and exterior installations
- Ideal for decks, sunrooms and basements
- Excellent moisture resistance when cured

SPECIFICATIONS

Item No.	6700-4	6700-1	6700-0
Unit Size	4 Gallon	1 Gallon	1 Quart
Package Qty.	1	4	6

TROWELS AND COVERAGE



1/8" x 1/8" x 1/16"
90-110 sq. ft. per gallon



1/8" x 1/8" x 1/8"
65-75 sq. ft. per gallon



3/32" x 3/32" x 3/32"
100-120 sq. ft. per gallon

Roberts 6700 is a solvent free adhesive designed for the exterior or interior installation of indoor/outdoor carpet. This adhesive is ideal for interior patios or sunrooms as well as basements.

Open Time: Up to 30 min. Working Time: Up to 60 min.

MULTI PURPOSE
CARPET
VINYL/NET/WALL BASE
WOOD
SPECIALTY
CLEANERS
REFERENCE
TROWELS

VINYL, VCT & WALL BASE ADHESIVES



Acrylic Vinyl Flooring Adhesive

R7901 SUPERIOR



FEATURES

- Flexible working time
- Plasticizer migration resistant
- Pressure sensitive characteristics
- Use with fiberglass & sheet vinyl

SPECIFICATIONS

Item No.	R7901-4	R7901-1
Unit Size	4 Gallon	1 Gallon
Package Qty.	1	4

TROWELS AND COVERAGE

Vinyl Tile & Plank	Vinyl Tile & Plank	Carpet (vinyl backed broad-loom)
1/16" x 1/32" x 1/32" 220-240 sq. ft. per gallon	1/16" x 1/16" x 1/16" 170-190 sq. ft. per gallon	3/32" x 3/32" x 3/32" 100-120 sq. ft. per gallon

Roberts R7901 is an adhesive which offers up front pressure sensitive characteristics, then turns to a hard set. This acrylic based vinyl flooring adhesive is designed for the installation of most vinyl floor coverings and carpets, and offers the flexibility of installing over porous and nonporous substrates.

Open Time: Up to 1 hr. **Working Time:** 1-2 hrs.

Fiberglass Sheet & Luxury Vinyl Tile Adhesive

2310 SUPERIOR



FEATURES

- Ideal for permanent or releasable installation
- Pressure sensitive; remains tacky
- Flexible working time

SPECIFICATIONS

Item No.	2310-4	2310-1
Unit Size	4 Gallon	1 Gallon
Package Qty.	1	4

TROWELS AND COVERAGE



Fiberglass Sheet & Luxury Vinyl Tile
1/16" x 1/16" x 3/32"
160-180 sq. ft. per gallon



Fiberglass Sheet & Luxury Vinyl Tile
1/16" x 1/16" x 1/16"
170-190 sq. ft. per gallon

Roberts 2310 is formulated with the desired tack for fiberglass sheet vinyl and luxury vinyl tile.

Permanent Install Open Time: Up to 25 min. Working Time: Up to 45 min. Releasable Install Tack Time: Approx 50 min.

Felt-Back Sheet Vinyl Adhesive

2001 SUPERIOR



FEATURES

- Developed specifically for felt-back sheet vinyl
- Medium to heavy traffic areas
- Optimal positioning time

SPECIFICATIONS

Item No.	2001-4	2001-1	2001-0
Unit Size	4 Gallon	1 Gallon	1 Quart
Package Qty.	1	4	6

TROWELS AND COVERAGE



Felt-Back Sheet Vinyl
1/16" x 1/16" x 3/32"
160-180 sq. ft. per gallon



Felt-Back Sheet Vinyl
1/16" x 1/16" x 1/16"
170-190 sq. ft. per gallon

Roberts 2001 is a superior, commercial grade, felt-back sheet vinyl adhesive. This adhesive was developed with the optimum open time and working time for the positioning of felt-back sheet vinyl flooring.

Open Time: Up to 25 min. Working Time: Up to 45 min.

Vinyl Composition Tile Adhesive

2057 SUPERIOR



FEATURES

- Dries clear for visible chalk lines
- Good residual tack
- Extended working time

SPECIFICATIONS

Item No.	2057-4	2057-1	2057-0
Unit Size	4 Gallon	1 Gallon	1 Quart
Package Qty.	1	4	6

TROWELS AND COVERAGE



Vinyl Composition Tile
1/16" x 1/16" x 3/32"
160-180 sq. ft. per gallon



Vinyl Composition Tile
1/16" x 1/16" x 1/16"
170-190 sq. ft. per gallon



Vinyl Tile & Plank
1/16" x 1/32" x 1/32"
220-240 sq. ft. per gallon

Roberts 2057 is a clear thin spread adhesive designed for the installation of vinyl composition tile (VCT).

Open Time: Up to 60 min. Working Time: 24 hrs.

Vinyl Composition Tile Adhesive

R7050 SUPERIOR



FEATURES

- No slip formula
- High shear
- Quick drying

SPECIFICATIONS

Item No.	R7050-4
Unit Size	4 Gallon
Package Qty.	1

TROWELS AND COVERAGE

Vinyl Composition Tile

1/16" x 1/16" x 3/32"
160-180 sq. ft. per gallon

Vinyl Composition Tile

1/16" x 1/16" x 1/16"
170-190 sq. ft. per gallon

Vinyl Tile & Plank

1/16" x 1/32" x 1/32"
220-240 sq. ft. per gallon

Roberts R7050 is a high performance clear thin spread adhesive designed for the installation of vinyl composition tile. Dries rapidly and swiftly develops high shear strength to hold tiles in place and eliminate slippage. May also be used to install vinyl composition tile over existing vinyl composition tile or over aged cutback adhesive residue (residential to light commercial installations).

Open Time: Up to 30 min. Working Time: Up to 4 hrs.

Commercial Wall Base Adhesive

R7275 SUPERIOR



FEATURES

- Holds on corners
- No open time required
- Strong bond

SPECIFICATIONS

Item No.	R7275-4	R7275-1	R7275-30C
Unit Size	4 Gallon	1 Gallon	30 oz
Package Qty.	1	4	12

TROWELS AND COVERAGE

Wall Base (4 in.)

1/8" x 1/8" V
150-200 lineal feet per gallon

Wall Base (4 in.)

1/8" x 1/8" x 1/8"
100-150 lineal feet per gallon

Wall Base (4 in.)

Nozzle Applicator
40-60 lineal feet per 30 oz

Roberts R7275 is a fast grabbing, strong holding commercial grade wall base adhesive. Exhibits great wet grab and corner wrapping capability.

Working Time: Up to 30 min.

Wall Base Adhesive

7200 SUPERIOR



FEATURES

- Excellent holding power
- Fast set-up
- Strong initial grab for holding
- Non-staining heavy rubber wall base

SPECIFICATIONS

Item No.	7200-4	7200-1	7200-30C	7200-11C
Unit Size	4 Gallon	1 Gallon	30 oz	11 oz
Package Qty.	1	4	12	12

TROWELS AND COVERAGE

Wall Base (4 in.)

1/8" x 1/8" V
150-200 lineal feet per gallon

Wall Base (4 in.)

1/8" x 1/8" x 1/8"
100-150 lineal feet per gallon

Wall Base (4 in.)

Nozzle Applicator
40-60 lineal feet per 30 oz

Roberts 7200 is a superior performing wall base adhesive with quick grab and rapid set-up for the fast installation of wall base.

Working Time: Up to 30 min.

WOOD ADHESIVES

All-In-One Wood Adhesive

R1540 SUPERIOR



FEATURES


- Superb flexibility to withstand expansion and contraction
- Excellent green grab, low VOC
- Permanent, tenacious bond and high elongation
- Low moisture permeability - non breathable polyurethane

SPECIFICATIONS

Item No.	R1540-4
Unit Size	4 Gallon
Package Qty.	1

IIC 70 STC 66 ΔIIC 22

TROWELS AND COVERAGE

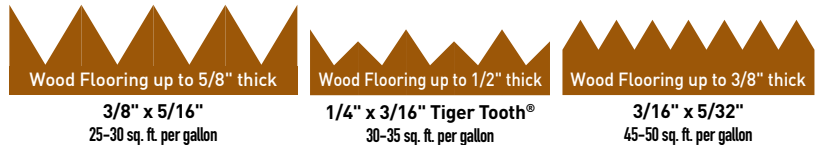

Roberts R1540 is an all-in-one, single step, water free, polyurethane adhesive formulated to bond engineered wood, solid wood and bamboo flooring to concrete, plywood and other approved substrates. This solvent free, moisture cure urethane formula performs as an adhesive, moisture vapor barrier, crack suppressant and sound reducer for wood and bamboo flooring installations. Provides moisture control on concrete slabs (up to 20 lbs. in MVER or 90% RH). Suitable for all wood flooring that is intended for glue-down installations.

Working Time: Up to 120 min. Initial Cure: 6-8 hrs. Final Cure: 12 hr minimum

Wood & Bamboo Flooring Adhesive

R1409 SUPERIOR




FEATURES

- Remains flexible to withstand expansion and contraction
- Permanent, tenacious bond and high elongation
- Cured adhesive is unaffected by moisture
- Excellent green grab, low VOC

SPECIFICATIONS

Item No.	R1409-4
Unit Size	4 Gallon
Package Qty.	1

TROWELS AND COVERAGE

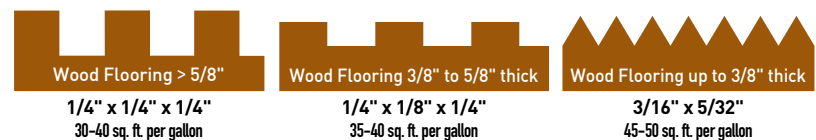

A single component, water free, polyurethane adhesive formulated to bond engineered wood, solid wood and bamboo flooring to concrete, plywood and other approved substrates. Develops a permanent bond and remains flexible to withstand expansion and contraction of the flooring without stressing the adhesive. Suitable for all wood flooring that is intended for glue-down installations.

Open Time: Up to 80 min. Working Time: Up to 120 min. Cure Time: 8-10 hrs.

Engineered Wood Flooring Adhesive

1407 PREFERRED



FEATURES

- Holds trowel ridge for optimum wood contact
- Excellent working time
- Soap and water clean up
- Also available in easy-to use cartridge size for quick repairs

SPECIFICATIONS

Item No.	1407-4	1407-1	1407RR-10C
Unit Size	4 Gallon	1 Gallon	10 oz
Package Qty.	1	4	12

TROWELS AND COVERAGE



Roberts 1407 is an acrylic urethane adhesive designed for the installation of engineered and parquet wood flooring.

Open Time: Up to 20 min. Working Time: Up to 30 min.

Engineered & Parquet Wood Flooring Adhesive

1404 PRIMARY



FEATURES

- High solids formula
- Excellent initial grab
- Great trowel ridge holding

SPECIFICATIONS

Item No.	1404-4	1404-1
Unit Size	4 Gallon	1 Gallon
Package Qty.	1	4

TROWELS AND COVERAGE



Prefinished Engineered Wood

1/4" x 1/4" x 1/4"
45-55 sq. ft. per gallon



Prefinished Parquet

1/8" x 1/8" x 1/8"
70-80 sq. ft. per gallon

Roberts 1404 is an adhesive specifically designed to adhere 3, 5 and 7-ply engineered wood flooring and pre-finished parquet. It develops an initial tack to assist in holding boards in place during installation which makes installation easier. It remains flexible and moves with wood as it reacts to environmental changes.

Open Time: Up to 15 min. Working Time: Up to 40 min.

Tongue & Groove Adhesive

1406 SUPERIOR



FEATURES

- Exceptional bond strength
- Fast drying
- Meets the specifications of Type II/D3

SPECIFICATIONS

Item No.	1406-P
Unit Size	1 Pint
Package Qty.	12

COVERAGE

- Up to 400 lineal feet per pint

A high strength, solvent free adhesive for tongue and groove flooring.

Assembly Time: Within 5 min. Drying Time: 24 hrs.

Universal Repair Kit

10-33



- Quickly repair scratches, cracks and other damage
- For use with wood floors, vinyl floors & counters, wood cabinets, moldings and furniture
- 5 colors to custom mix and create unlimited shades to match any project
- Shipped in a master pack of six kits with clip strip for easy displays

WOOD BOOSTER™ Injection Repair Kit

R1550-K PREFERRED



KIT CONTENTS

- WOOD BOOSTER™ Repair Adhesive (1 qt)
- Applicator syringe (1)
- Metal drill bits (2)
- Dowels (8)
- Dowel punch (1)

SPECIFICATIONS

Item No.	R1550-K	R1550-0
Unit Size	1 Kit	1 Quart
Package Qty.	10	8

Roberts R1550 Wood Booster Injection Repair Kit is designed as a fast and easy solution to eliminate troublesome hollow spots and loose areas in engineered wood flooring. Floor can be walked on immediately.

SPECIALTY ADHESIVES & ACCESSORIES



Contact Cement

1092 **PREFERRED**



FEATURES

- Fast drying
- Water resistant
- Great holding power

SPECIFICATIONS

Item No.	1092-1	1092-0
Unit Size	1 Gallon	1 Quart
Package Qty.	4	6

COVERAGE

- Approximately 331 pieces of 1 in. x 2 in. x 7 in. strip, or 378 lineal ft. of tackstrip per quart

Roberts 1092 is a solvent-based, brush-grade contact cement. **EXTREMELY FLAMMABLE**

Assembly Time: Until dry, Approx. 15 min. Tack Range: Up to 1 hrs.

Contact Cement Adhesive

R1030 **PREFERRED**



FEATURES

- High bond strength
- Water resistant
- OTC compliant

SPECIFICATIONS

Item No.	R1030-1	R1030-0
Unit Size	1 Gallon	1 Quart
Package Qty.	4	6

COVERAGE

- Up to 380 sq. ft. (or 190 sq. ft. of bonded material) per gallon

Roberts R1030 is a solvent-free, brush-grade, polychloroprene latex based contact cement adhesive. It may be used to bond a wide variety of surfaces and offers a high strength, high coverage formula. Finished assemblies can be used immediately.

Open Assembly Time: Until dry, Approx. 30 min. Tack Range: Up to 2 hrs.

Carpet Pad Adhesive

R5015 SUPERIOR



FEATURES

- Fast bonding
- Short open time
- Great residual tack
- Excellent wet suction
- OTC compliant

SPECIFICATIONS

Item No.	R5015-1
Unit Size	1 Gallon
Package Qty.	4

COVERAGE

- Approximately 500 to 700 linear feet per gallon, depending on application method

Roberts R5015 is a solvent based adhesive with powerful initial grab to hold carpet pads in place quickly. Roberts R5015 is a superior adhesive developed for the adherence of carpet pads prior to the installation of stretch-in carpet. **EXTREMELY FLAMMABLE**

Open Time: Up to 5 min.

Carpet Pad Adhesive

4020 SUPERIOR



FEATURES

- Superior wet grab
- Powerful tack
- Rapid installation

SPECIFICATIONS

Item No.	4020-1
Unit Size	1 Gallon
Package Qty.	4

COVERAGE

- Approximately 500 to 700 linear feet per gallon, depending on application method

Roberts 4020 is a solvent based adhesive with powerful initial grab to hold carpet pads in place quickly. A superior adhesive developed for the adherence of carpet pads prior to the installation of stretch-in carpet. **EXTREMELY FLAMMABLE**

Open Time: Up to 10 min.

Carpet Pad Adhesive

4002 PREFERRED



FEATURES

- Prevents pad movement for trouble-free installations
- Permanent bond
- Quick drying

SPECIFICATIONS

Item No.	4002-1
Unit Size	1 Gallon
Package Qty.	4

COVERAGE

- Approximately 500 to 700 linear feet per gallon, depending on application method

Roberts 4002 is a solvent free, enviro-friendly carpet pad adhesive developed to hold carpet pads in place during stretch-in carpet installations.

Open Time: Up to 15 min.

Carpet Latex

8502 PREFERRED



FEATURES

- Binds carpet edges
- Seam sealer
- UV tracer

SPECIFICATIONS

Item No.	8502-1	8502-0
Unit Size	1 Gallon	1 Quart
Package Qty.	4	12

COVERAGE

- Up to 660 lineal feet per quart

Roberts 8502 Carpet Latex is a natural latex adhesive recommended for seam sealing carpets and binding carpet edges. Roberts 8502 contains a UV tracer for easy detection.

Open Time: Up to 10 min.

Universal Carpet Seam Sealer

8015 SUPERIOR



FEATURES

- Fast drying
- UV tracer

COVERAGE

- Approximately 625 lineal feet per quart

Roberts 8015 is a universal, solvent free carpet seam sealer developed for seaming most types of carpets, including vinyl backed. This product seals cut edges to prevent raveling and may also be used to repair bubbles in installations.

Open Time: Up to 10 min.

SPECIFICATIONS

Item No.	8015-0	8015-A
Unit Size	1 Quart	8 Ounces
Package Qty.	6	12

Glue-Down Carpet Seam Adhesive

8415 PREFERRED



FEATURES

- Fast drying, solvent based
- For direct glue-down installations
- Freeze-thaw stable

COVERAGE

- Up to 660 lineal feet per quart

Roberts 8415 is recommended for seam sealing to prevent unraveling, loss of face yarns and/or delamination of backings on foam rubber, urethane, jute, woven, latex unitary and polypropylene backed carpets. Not recommended for vinyl. Resistant to fungus, mildew, water and commercial carpet cleaning.

Open Time: Up to 10 min.

SPECIFICATIONS

Item No.	8415-0
Unit Size	1 Quart
Package Qty.	6

Carpet Seam Sealer

R5200 PREFERRED



FEATURES

- Ultra fast drying
- High strength
- UV tracer
- Dries clear
- OTC compliant

COVERAGE

- Up to 660 lineal feet per quart

Roberts R5200 is a commercial grade seam sealer developed to seam most types of carpets and to prevent edge raveling. R5200 may also be used to repair bubbles in existing installations.

EXTREMELY FLAMMABLE

Open Time: Up to 10 min.

SPECIFICATIONS

Item No.	R5200-0
Unit Size	1 Quart
Package Qty.	6

Seam Adhesive Applicator

10-145



FEATURES

- Designed to apply seam sealer to carpet backs
- Applicator nozzle on 8 oz. plastic squeeze bottle

SPECIFICATIONS

Item No.	10-145
Unit Size	Holds 8 Ounces
Package Qty.	25

Roberts 10-145 is an empty seam adhesive applicator bottle used for dispensing seam sealing products, such as Roberts 8015 Universal Carpet Seam Sealer.

Cork Adhesive

7250 **PREFERRED**



FEATURES

- No VOCs
- Solvent free

SPECIFICATIONS

Item No.	7250-4	7250-1
Unit Size	4 Gallon	1 Gallon
Package Qty.	1	4

TROWELS AND COVERAGE



Cork Underlayment

1/8" x 1/8" x 1/8"
50-70 sq. ft. per gallon



Cork Underlayment

3/32" x 3/32" x 3/32"
100-120 sq. ft. per gallon

Roberts 7250 Cork Adhesive is designed to adhere unfinished cork underlayment to plywood of underlayment quality and concrete above, on or below grade. This latex-based cork adhesive provides a strong initial grab and good tack.

Drying Time: 24 hrs.

Heavy Duty Construction Adhesive

R8300 **SUPERIOR**



FEATURES

- Waterproof
- Impact resistant
- Interior or exterior use
- OTC compliant
- Professional use only

SPECIFICATIONS

Item No.	R8300-30C
Unit Size	30 oz.
Package Qty.	12

COVERAGE

- 90 lineal ft. per 30 ounce cartridge, using a 1/4 in. bead

Roberts R8300 is a versatile solvent-based, weatherproof adhesive used to bond plywood, wood subfloors, paneling, and fiber composition board. R8300 will bond to wet and frozen lumber and is perfect for exterior construction and decks. **EXTREMELY FLAMMABLE**

Ceramic Tile Adhesive

5900 **PREFERRED**



FEATURES

- Quick grabbing
- Fast drying
- Premixed

SPECIFICATIONS

Item No.	5900-3	5900-1	5900-0
Unit Size	3.5 Gallon	1 Gallon	1 Quart
Package Qty.	1	4	6

TROWELS AND COVERAGE



Glazed Wall Tile

3/16" x 5/32"
12-14 sq. ft. per gallon



Heavy & Rough-Backed Tile

1/4" x 1/4" x 1/4"
7-9 sq. ft. per gallon

Roberts 5900 Ceramic Tile Adhesive is a high performance, ready-to-use, Type 1 organic ceramic tile mastic used to install ceramic wall tile over a variety of substrates. This adhesive may also be used for countertop and backsplash installations.

Drying Time: 24 hrs.

Calcium Chloride Moisture Test Kit

10-645
10-646



KIT CONTENTS

- Anhydrous Calcium Chloride in plastic screw lid jar
- Transparent air tight plastic cover
- (2) pH alkalinity tests and solution
- Air tight mail pouch
- Self addressed envelope
- FREE third party test results and archival service

SPECIFICATIONS

Item No.	10-645	10-646
Package Qty.	12	10 (3pk)

Roberts 10-645 and 10-646 are for measuring moisture vapor emission rate and surface alkalinity of a concrete subfloor. Complies/exceeds ASTM F-1869 standard test method.

ADHESIVES CLEANERS



Urethane/Multipurpose Adhesive Remover

R5505 SUPERIOR



FEATURES

- Specialty adhesive remover
- Works on most flooring adhesives
- Fast acting
- Advanced technology formula
- Extremely low odor
- Rinses easily with water

SPECIFICATIONS

Item No.	R5505	R5505-W
Unit Size	1 Quart	60 Wipes
Package Qty.	12	6

Roberts R5505 is a superior adhesive remover to aid in the removal of adhesive from flooring surfaces and tools. Also available as wipes.

Adhesive Remover/Cleaner

R8100 SUPERIOR



FEATURES

- Professional strength
- Low odor
- OTC compliant

SPECIFICATIONS

Item No.	R8100-24
Unit Size	24 Ounce
Package Qty.	12

Roberts R8100 Adhesive Cleaner is a commercial grade VOC compliant professional strength cleaner for the speedy removal of most adhesives and carpet seam sealers.

Carpet & Adhesive Remover Concentrate

R8000 PREFERRED



FEATURES

- Fast acting
- Low odor
- Non-flammable
- Low VOC
- OTC compliant

SPECIFICATIONS

Item No.	R8000-4	R8000-1
Unit Size	4 Gallon	1 Gallon
Package Qty.	1	4

Roberts R8000 concentrate is an environmentally friendly, plant-based carpet and adhesive remover developed to efficiently and effectively remove floor coverings and adhesives without harsh chemicals. This commercial strength formula removes both acrylic and latex adhesives.

Adhesive Reference Chart

- EXCELLENT
- ◐ BETTER
- GOOD

		CARPET BACKING TYPES							SEALERS			CPT PAD	MISC			RESILIENT			WALL BASE	WOOD					
		Polypropylene (ActionBac®)	Latex Foam, Sponge Rubber	Urethane / Polypropylene Foam	Hot Melt	Latex Unitary	Needlepunch (interior)	Woven	Carpet Tile	Outdoor Carpet	Indoor/Outdoor Carpet	Direct-Glue Seam Sealer	Seam Sealer (used w/heatbond tape)	Bubble Repair (carpet, sheet vinyl, pads)	Residential Carpet Pad	Cork Underlayment Sheets	Doublebond (Carpet Cushion)	Doublebond (Cushion to Substrate)	Solid Vinyl Tile & Plank	Felt-Back Sheet Vinyl	Fiberglass Sheet & Luxury Vinyl Tile	Vinyl Composition Tile	Wall Base (Vinyl, Rubber, TPR)	Prefinished Engineered & Parquet	Solid Wood & Bamboo
3300	Carpet & Felt-Back Vinyl	●	●	◐	●	●	●								●	●	●								
3085	Carpet & Felt-Back Vinyl	◐	◐	◐	◐	◐	◐								●										
R3080	Carpet & Felt-Back Vinyl	●					◐								◐										
3000	Carpet & Felt-Back Vinyl	○	○				○								○										
3050	Carpet & Felt-Back Vinyl	○	○				○								○										
3095	Carpet	●	●	●	●	●	●								●	●	●								
R3090	Carpet	●	●													●	●								
3500	Carpet	○	○	○	○	○																			
3900	Carpet	◐	◐	●	●	●	◐	◐							◐										
R6300	Pressure Sensitive							●									●								
R6280	Pressure Sensitive							◐									◐								
R6030	Outdoor Carpet	●							●																
R6040	Outdoor Carpet								●	●															
6700	Indoor/Outdoor Carpet								●	●															
R7901	Acrylic Vinyl Flooring																	●		●					
2310	Fiberglass Sheet & Luxury Vinyl Tile																			●					
2001	Felt-Back Sheet Vinyl																		●						
2057	Vinyl Composition Tile																				●				
R7050	Vinyl Composition Tile																				●				
R7275	Commercial Wall Base																					●			
7200	Wall Base																					●			
R1540	All-In-One Wood Flooring																						●	●	
R1409	Wood & Bamboo Flooring																						●	●	
1407	Engineered Wood Flooring															●							◐		
1404	Engineered & Parquet Wood Flooring															●							◐		
1406	Tongue & Groove																						●		
R1550	WOOD BOOSTER™ Kit																						●		
7250	Cork														◐										
8015	Universal Carpet Seam Sealer										●	●	●												














Industry Partnerships



MULTIPURPOSE
CARPET
VINYL/VCT/WALL BASE
WOOD
SPECIALTY
CLEANERS
REFERENCE
TROWELS

Trowel Chart

All trowels measure: Width x Depth x Space Apart

NOTCH SIZE	APPLICATION	ITEM NO.	COVERAGE
 1/8" x 1/8" x 1/16"	Carpet (polypropylene, woven)	49737, 10137-12	90-110 square feet per gallon
 1/16" x 1/16" x 3/32"	Felt-Back Sheet Vinyl, Vinyl Composition Tile, Fiberglass Sheet & Luxury Vinyl Tile	49736, 10121-12	160-180 square feet per gallon
 1/16" x 1/16" x 1/16"	Felt-Back Sheet Vinyl, Carpet Tile, Vinyl Tile & Plank, Vinyl Tile Composition, Fiberglass Sheet & Luxury Vinyl Tile	10-810, 10-823, 10125, 10-180 (DOUBLE SIDED)	170-190 square feet per gallon
 1/8" x 1/8" 1/8"	Carpet (polypropylene, woven)	n/a	65-75 square feet per gallon
 3/32" x 3/32" x 3/32"	Carpet (closed-celled urethane, Enhancer™), Carpet (vinyl backed broad-loom)	10-820, 10-833	100-120 square feet per gallon
 1/16" x 1/32" x 1/32"	Vinyl Tile & Plank, VCT over VCT	10-816, 10-829, 10-180 (DOUBLE SIDED)	220-240 square feet per gallon
 1/8" x 1/8"	Wall Base (4 in.),	n/a	150-200 lineal feet per gallon
 1/8" x 1/8" 1/8"	Wall Base, Prefinished Parquet	49732, 10123-12	100-150 lineal feet per gallon 70-80 square feet per gallon
 Snuzzle Applicator	Wall Base	10-981-25	40-60 lineal feet per 30 ounces
 1/4" x 1/4" x 1/4"	Prefinished Engineered Wood (1/2 in. thick) Solid Wood & Bamboo Flooring (1/2 in. thick)	49713Q, 10113Q	30-40 square feet per gallon
 1/4" x 1/4" 1/4"	Prefinished Engineered Wood (1/2 in. thick)	10142-12	45-55 square feet per gallon
 3/8" x 5/16"	Wood Flooring (1/2 in. to 3/4 in. thick)	10143	25-30 square feet per gallon
 1/4" x 3/16" Tiger Tooth®	Wood Flooring (1/2 in. thick)	10144	30-35 square feet per gallon

The products and specifications listed in this catalog are current as of the printed date of this catalog and are subject to change. Refer to product data sheet and material safety data sheet for additional information. The trowel notches referenced are those typically recommended for the type of wall/flooring products being installed. They are normally the minimum size recommended. Consult wall/ flooring manufacturer for their specific trowel recommendation. Surface conditions (roughness and porosity of surface/substrate) type of product and backing of product will ultimately determine the required trowel notch size and coverage.

See our Tool Catalog for a complete listing of our Carpet, Tile, Stone, Laminate, Wood and Vinyl installation tools and accessories.



1001 Broken Sound Parkway, NW | Suite A
Boca Raton, Florida 33487

www.robertsconsolidated.com

Customer Service: 866-435-8665

Technical Assistance: 706-277-5294

Easy access to product data sheets, technical bulletins and MSDS sheets
24 hours a day, 7 days a week through our continuously updated website



F1114-8741
Printed February 2014
Reorder # ROBADHESIVE2014